





1. bind long edges of each panel with hem tape

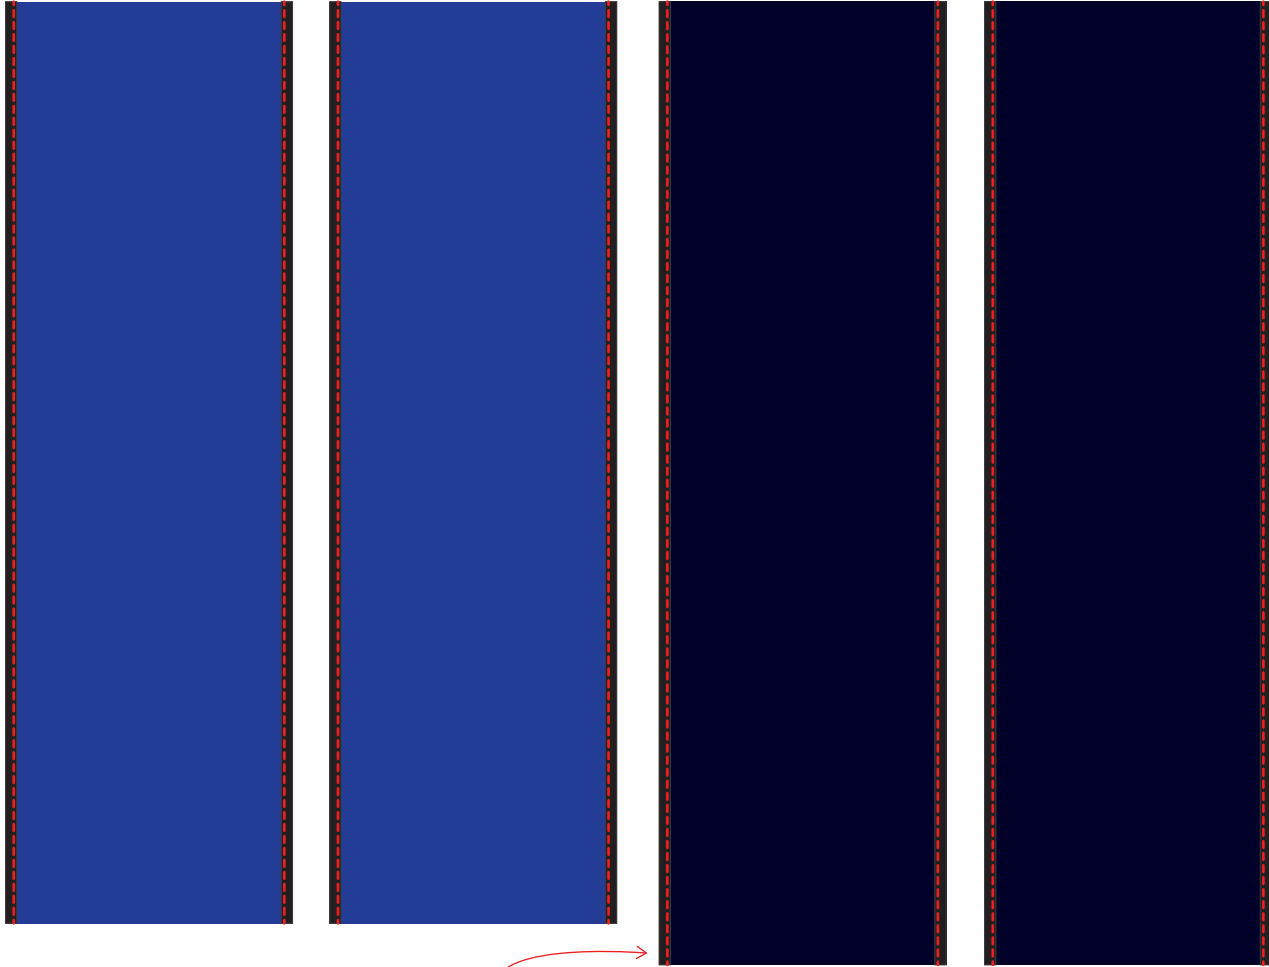

back panels are cut 1" longer than front panels

2. shoulder seams



bind seam allowance with hem tape

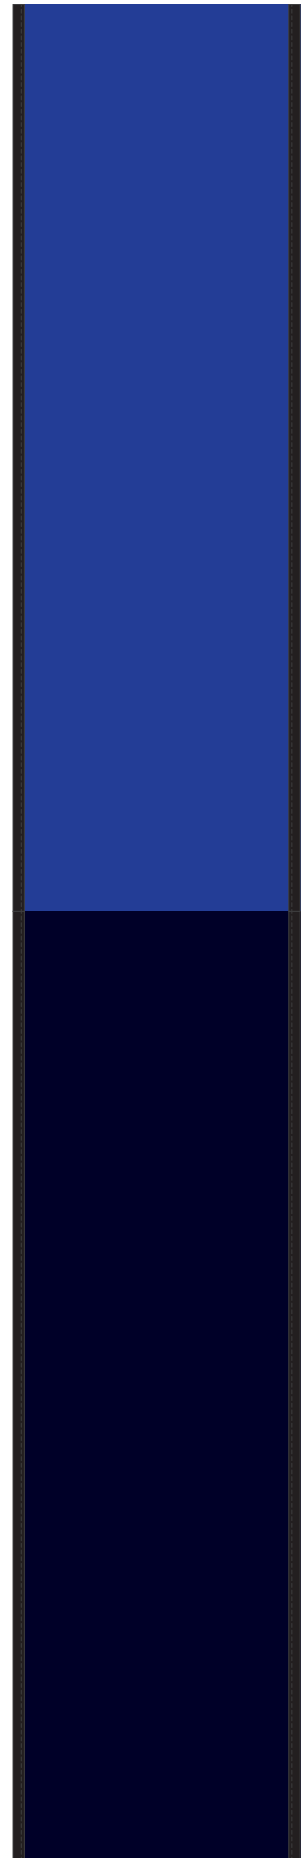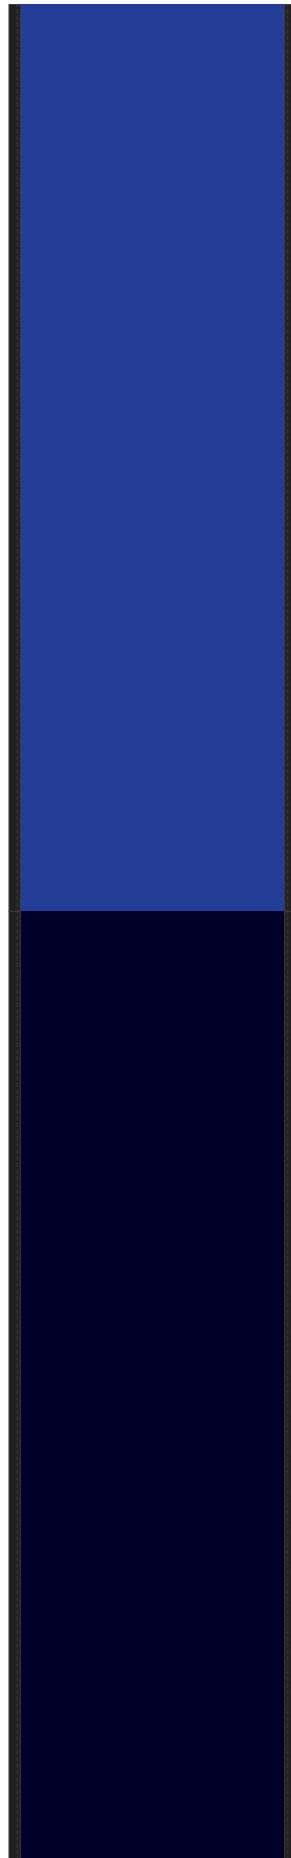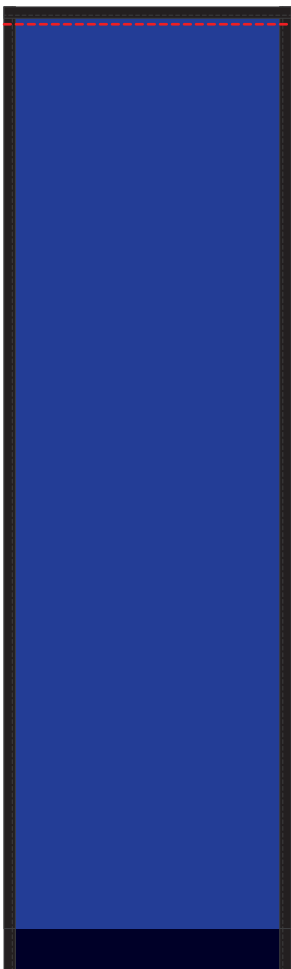

3. front and back center seams

1" seam allowance

interior view

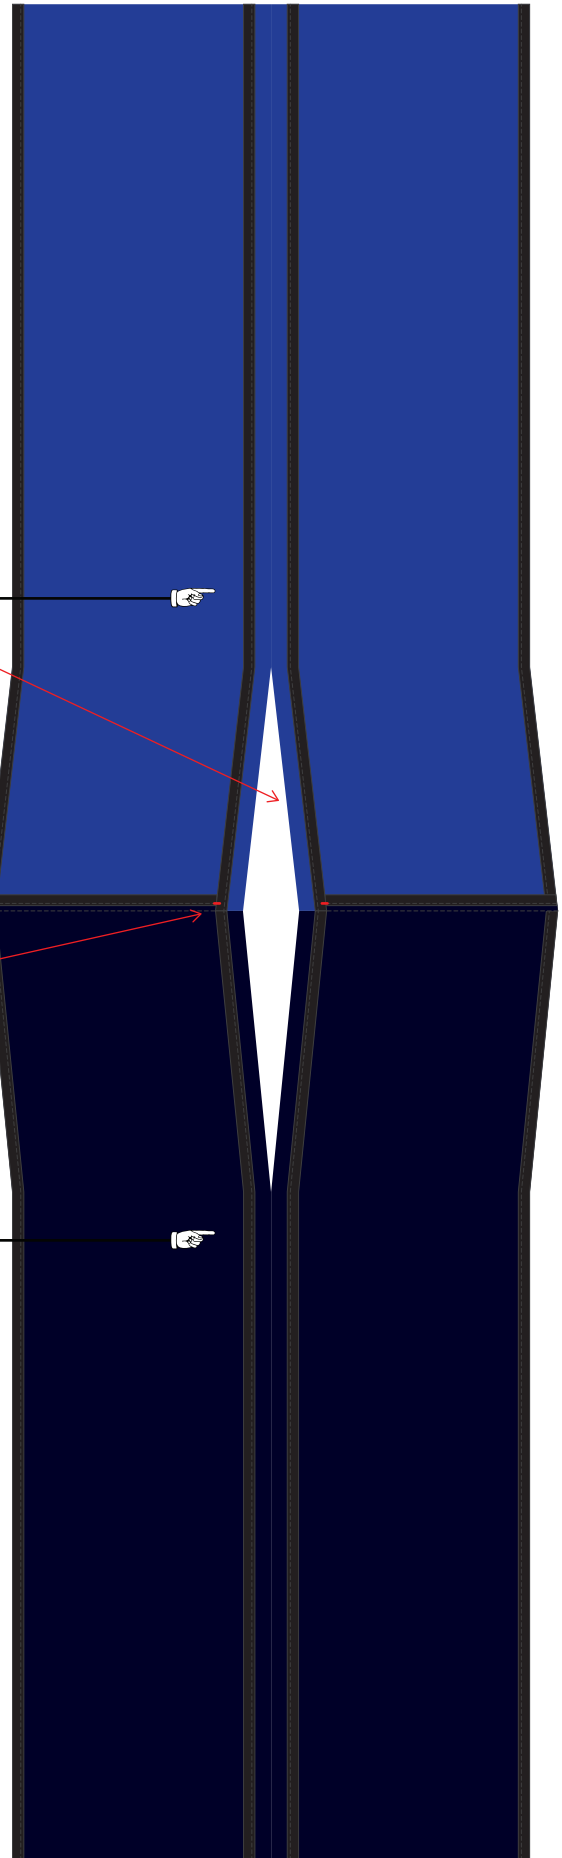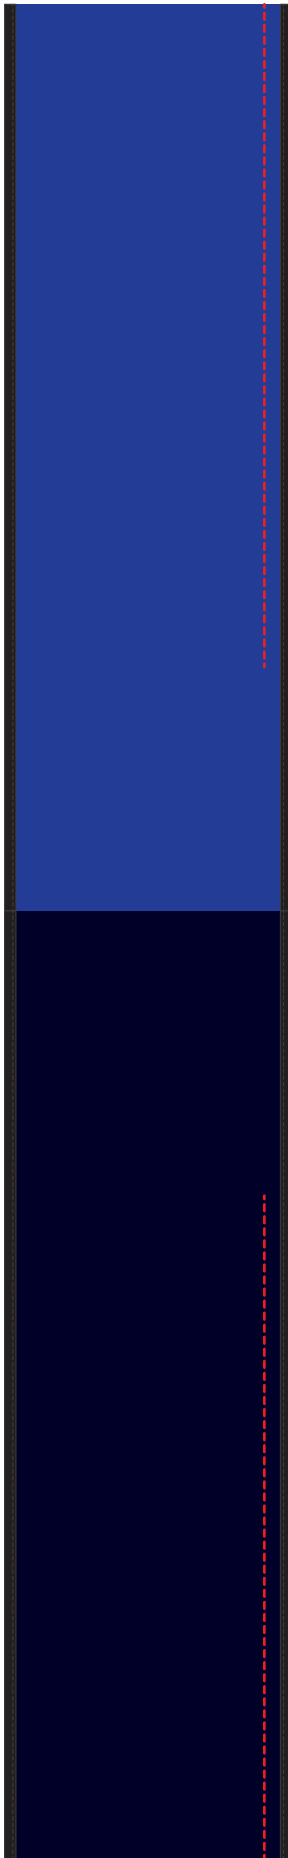

press the neck opening
in line with the seams

tack stitch seam
allowance to shoulder
seam binding

4. side seams

tack stitch seam allowance

to shoulder seam binding

press the armhole
openings in line
with the seams

1" seam allowance

